

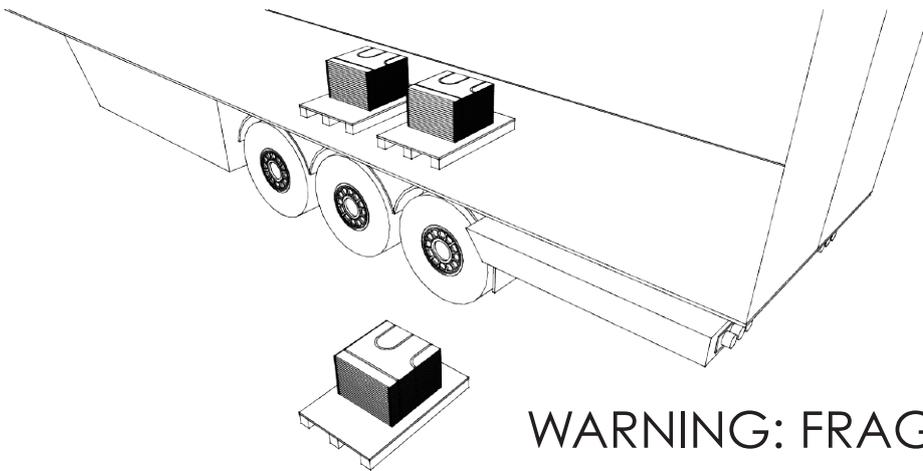


1. DELIVERY AND UNLOADING TRUCK

- * Make sure material don't get wet
- * Check each pallets house project number before taking material inside in specific house
- * Make sure that floor heating boards are carried gently and NO damages are made on the way inside the building site, which can cause problems for later assembling process if something is damaged.

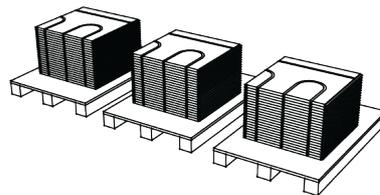

WARNING: FRAGILE !!!

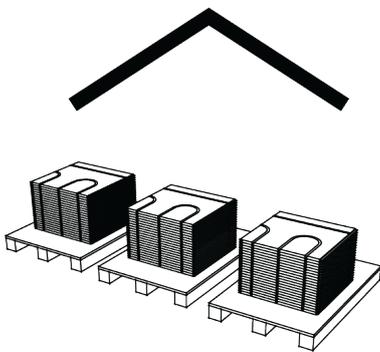

WARNING: NOT WATER RESISTANT !!!

SUMMARY:


- UNLOAD CAREFULLY;
- STORE BOARDS INDOORS IN DRY PLACE;
- PROTECT BOARD EDGES;
- PROTECT LARGER CUSTOM BOARDS (BRAKE HAZARD);

2. BRINGING IN AND SORTING BOARDS ON BUILDING SITE

* All standard floor board elements sort in groups and position them vertically against wall with board number facing towards and being in upper part


* Same with custom made boards sort them in size groups and lace them vertically against wall with board number facing towards you and being in upper part.

NOTE! (While installing floor boards, this upper described system will help to find quick and easy all necessary parts for easier assembling process)

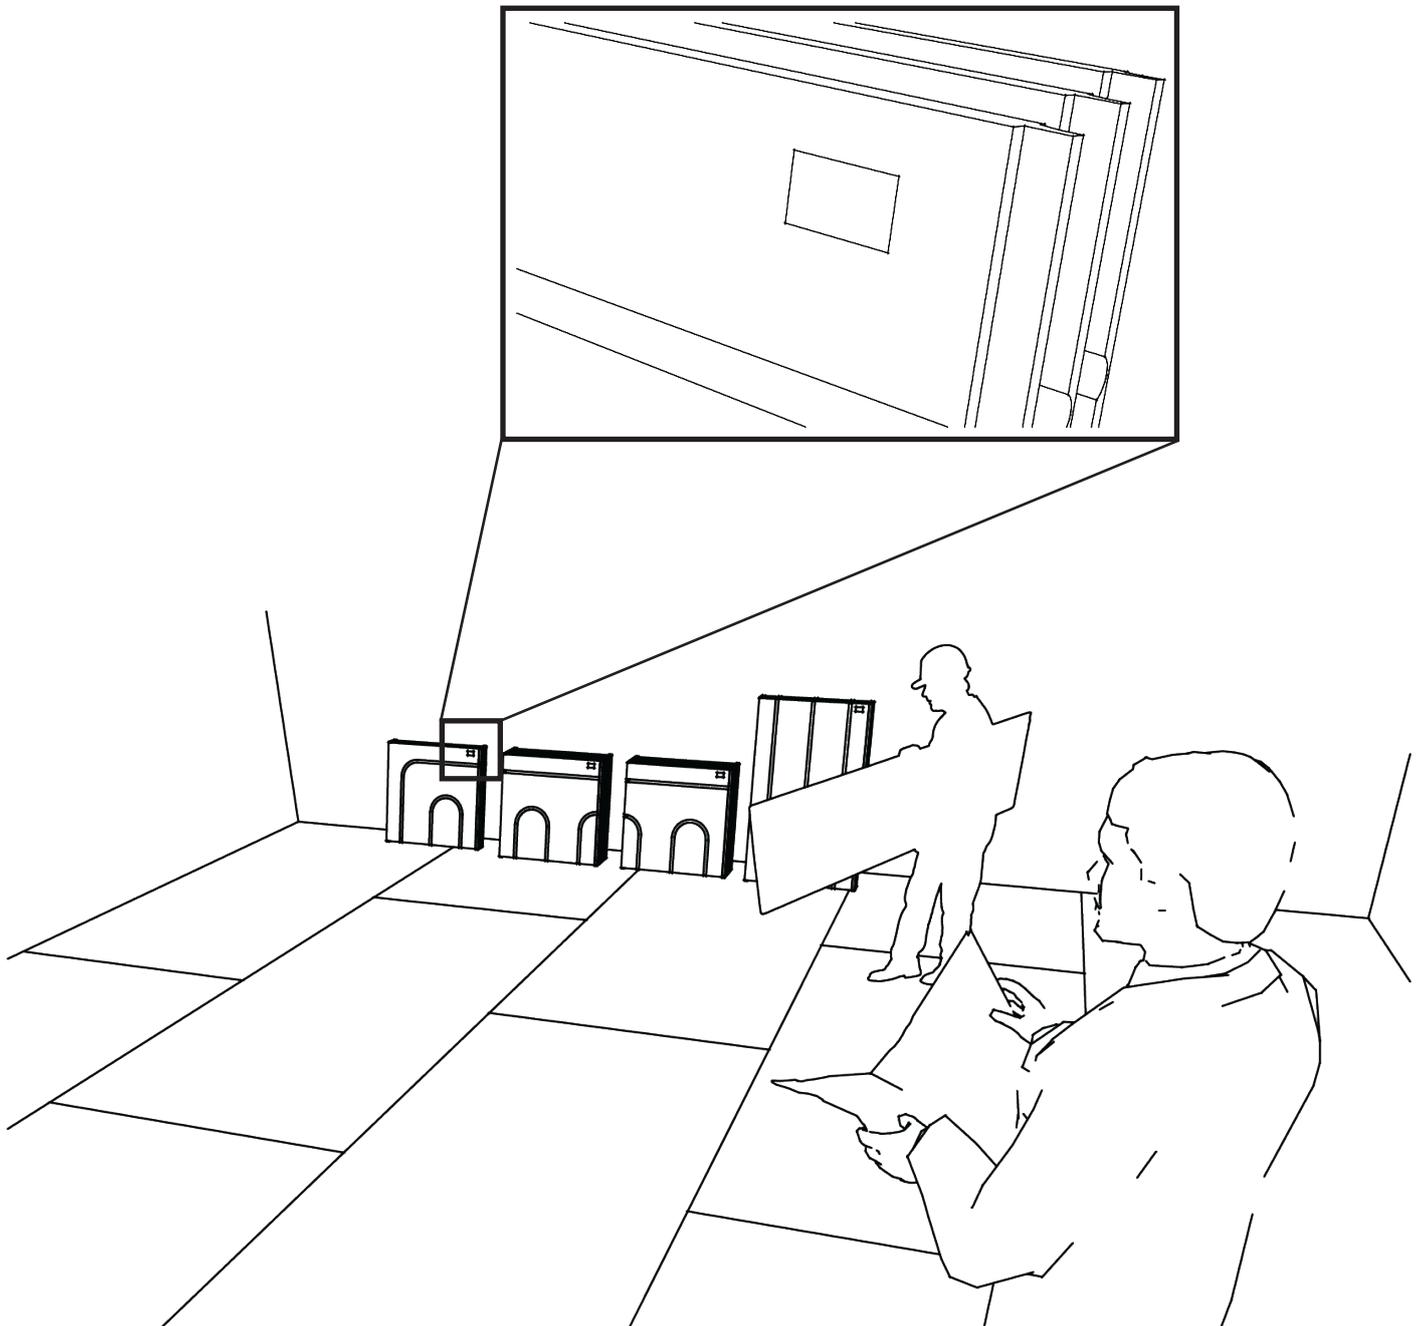

3. PRE-WORK AND PREPERATION BEFORE INSTALLATION


* Make sure all floor surfaces are clean and if needed sweep it with broom or vacuum with vacuum cleaner.

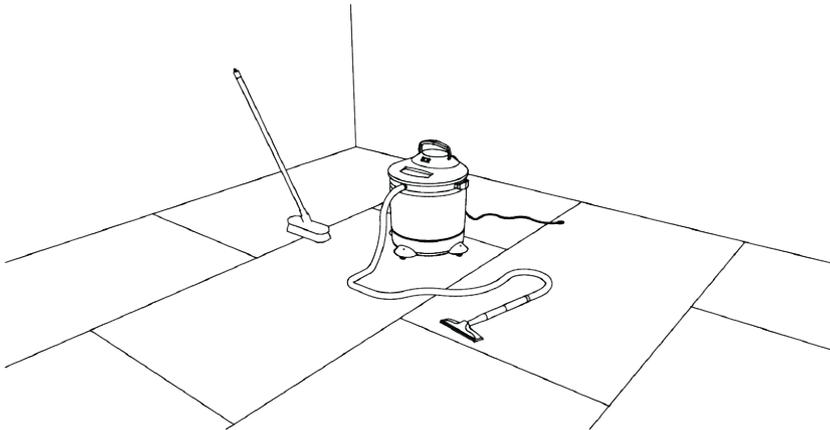

4. INSTALLATION

* Check floor layout plan with existing situation on site. Recomendded starting area for heating floor boards is around floor heating collector manifold box area.


* RORBO floor heating boards are designed with 20 mm distance from every finnished wall panel. NOTE! Walls should be be finnished with OSB and plasterboard!

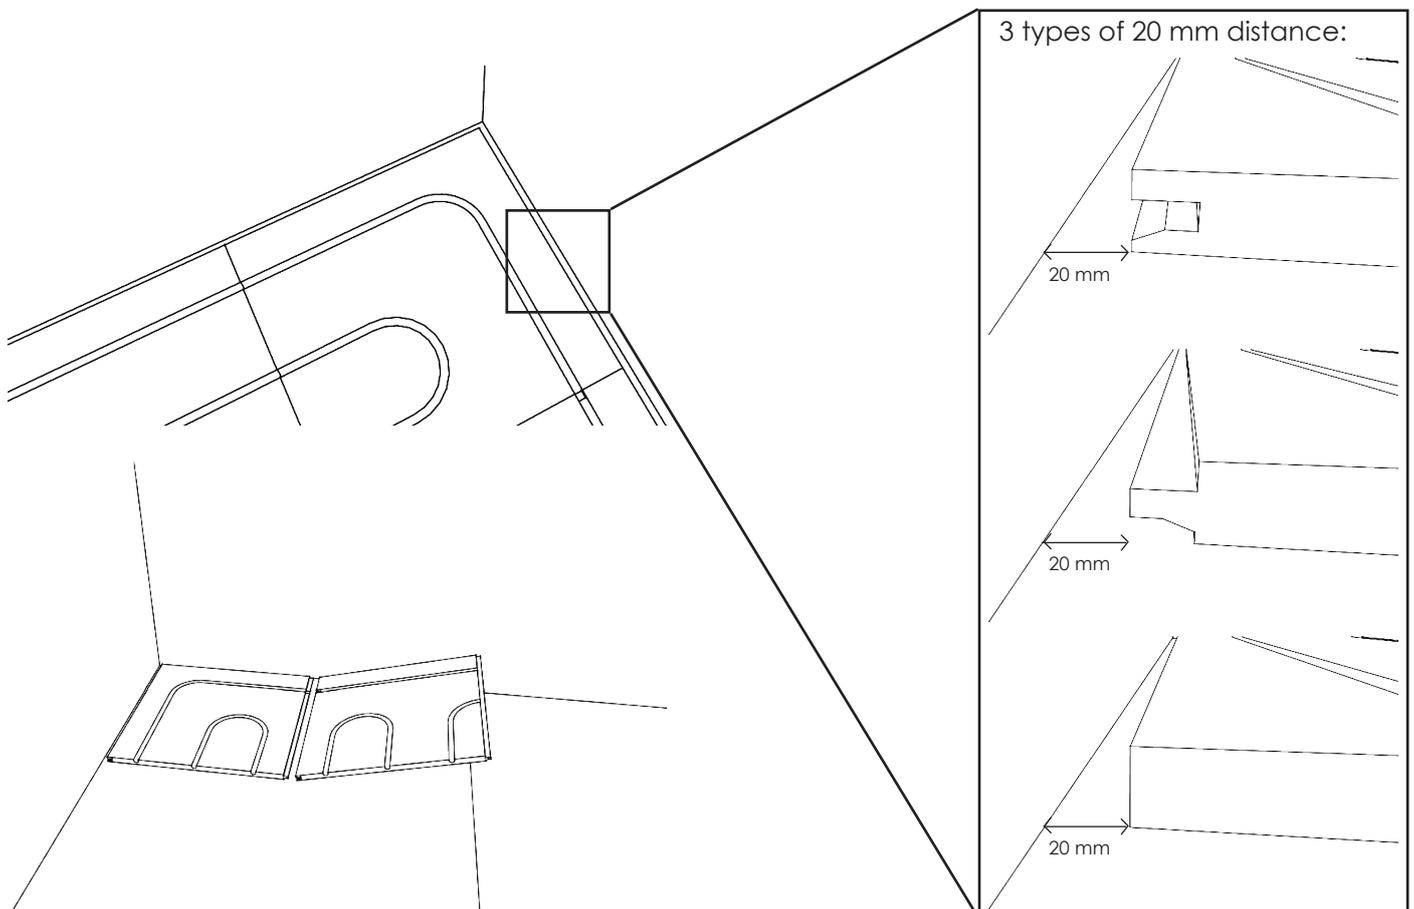


* First 3 to 5 boards install without fixing them with screws. This gives opportunity to align the floor boards along the wall with 20 mm distance. When aligning is finished fix boards with screws (approx. 12 - 15 screws per m²).

* When using hammer use wood seperator. Otherwise it can damage board edges.

CORRECT

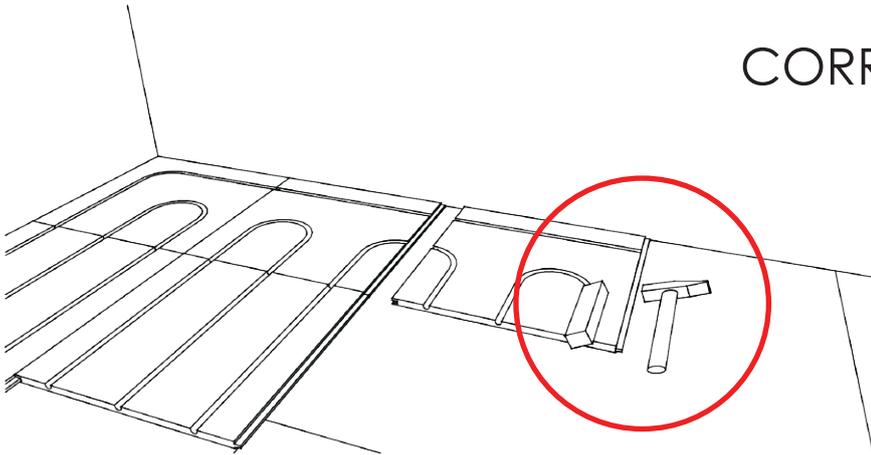


WRONG

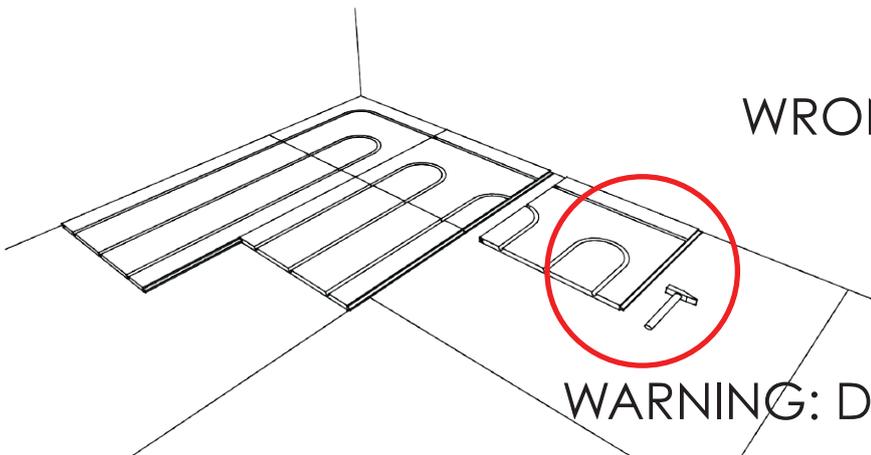

WARNING: DAMAGE HAZARD !!!

FIX BOARDS WITH SCREWS
approx. 12 - 15 screws per m²

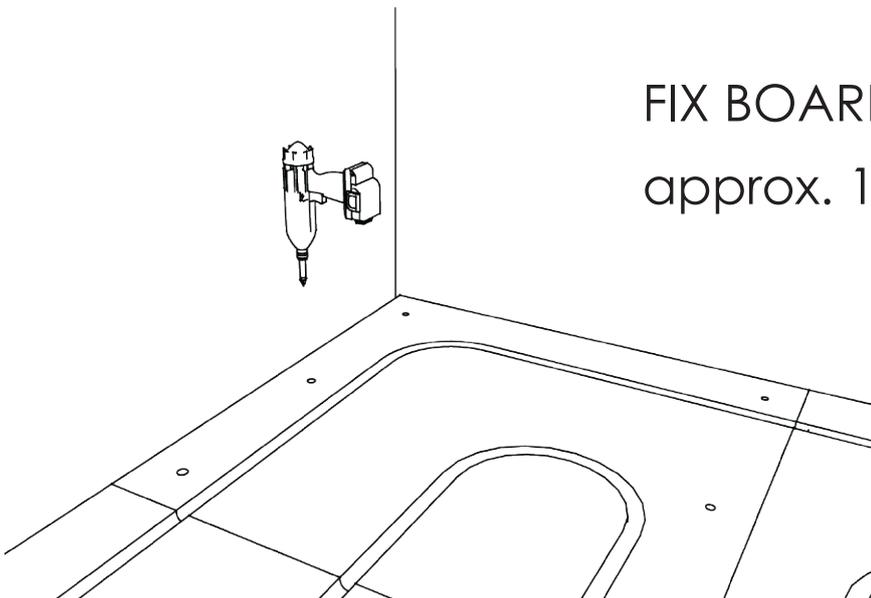



FOR MORE INFORMATION CONTACT US:

e: info@rorbo.lv / t: +371 29408235 / w: www.rorbo.eu

SIA "DAMSON", LV40103425862
"APOGI", Siguldas pagasts, Siguldas novads, LV2150